

8900 Series Macerator Toilets

Simple elegance. Unlimited possibilities.



Model 8979 MasterFlush toilet with standard Dometic flush touchpad

One luxurious look – with many designer-friendly options. That summarizes the distinct advantage of SeaLand 8900 series macerator toilets powered with MasterFlush® technology.

SeaLand 8900 series MasterFlush® toilets provide an abundance of features to satisfy diverse owner preferences and meet virtually any boatbuilder requirement. The contemporary shape features a compact footprint to fit in most any head compartment. 8900 series toilets include a “soft-close” seat action, and come in low-profile and standard-height units. Discriminating owners may choose from additional options: toilet or toilet/bidet combination unit; white or bone colors.

Two flush settings help manage water use. The “Normal” flush setting consumes 0.67 gal. (2.54 liters) of water and adds water to the bowl after every flush. “Low” flushing uses only 0.17 gal. (0.64 liters) per flush and very little water remains in the bowl.

The ceramic styling of the 8900 series matches that of our highly popular 4800 series VacuFlush® toilets. This advantage provides boat designers the added ability to offer choices in toilet technology across all boat model lines without altering the decor or floor plans of the baths.

Key Benefits

- Powerful macerator flush
- Small footprint – fits in most any head compartment
- Standard and low-profile heights
- Through-the-floor and through-the-wall discharge fittings
- Toilet only or toilet/bidet combination models
- “Soft close” seat hinge
- “Normal” or “Low” flush options
- Dometic electronic touchpad, standard
- Vimar or Gewiss compatible switch, optional (order separately)
- 12 V DC or 24 V DC operation
- Fits in same footprint as 4800 series VacuFlush® toilet



Toilet/bidet models combine electronic-flush operation with manually controlled, variable temperature bidet wash. Features gentle, aerated water flow.

Specifications for 8900 Series MasterFlush® Toilets

MODEL	DESCRIPTION	VOLTAGE
8939	Low-profile macerator toilet with touchpad flush control*	12 V or 24 V DC
8979	Standard-height macerator toilet with touchpad flush control*	12 V or 24 V DC
8949	Low-profile height macerator toilet/bidet combination with touchpad flush control*	12 V or 24 V DC
8989	Standard-height macerator toilet/bidet combination with touchpad flush control*	12 V or 24 V DC
4802	Low-profile manual bidet (complements 8900 styling)	–
4801	Standard-height manual bidet (complements 8900 styling)	–


* DFT touchpad flush switch is included with all toilet models. Optional DFS or DFP flush switch must be ordered separately. Toilet-only and bidet-only fixtures available in white or bone colors. Toilet/bidet models available in white. See price list for all toilet item numbers. Specifications subject to change without notice.

ELECTRICAL	Circuit breaker	20 amps/12 V DC; 15 amps/24 V DC
	Wiring	12 ga. (up to 20 ft./6.1 m from breaker)
WATER SUPPLY	Fitting	0.5 in. NPT
	Flow rate	2.0 gpm/7.6 lpm min. at toilet
DISCHARGE	ID	1.5 in./38 mm or 1 in./25 mm minimum
	Horizontal run*	98 ft./30 m maximum
	Vertical run*	9.8 ft./3 m maximum
	Tank capacity	30 gal./114 liters recommended
REQUIRED COMPONENTS	Electric flush switch**	Dometic DFT, DFS or DFP model

* Horizontal and vertical run distances are not cumulative. Check for adequate discharge flow if installation nears one of these limits.

** DFS or DFP model must be purchased separately. Specifications subject to change without notice.

Dimensions

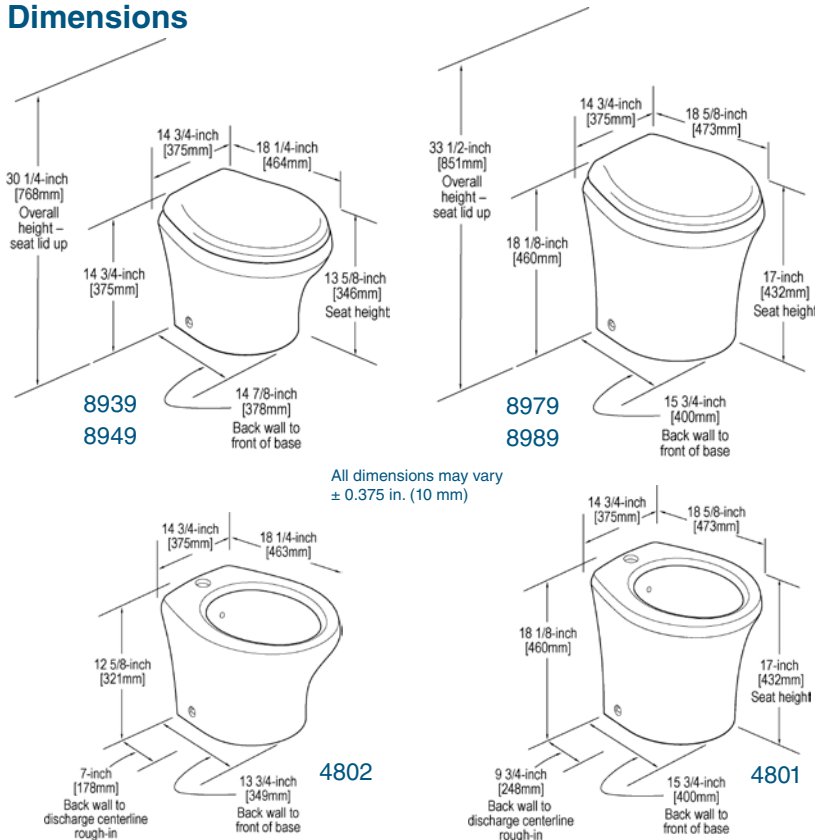

Dometic Flush Touchpad



Standard DFT panel includes “add water” and “flush” functions, “power on” and “full tank” indicator lights. Also available in white. Ships with toilet unless specified otherwise.

Dometic Flush Switches (for Vimar, Gewiss trim)



Optional Dometic flush switch panels feature backlit push buttons for easy use, even in low light.

DFS model includes a generic frame, or can be fitted with a Vimar Idea, Vimar Eikon, or Gewiss Chorus frame.

DFP model accommodates a Gewiss Playbus frame.

DFS or DFP models must be ordered separately from toilet.

See page 13 for Flush Switch details.

Flush Settings

Change from “Normal” to “Low” flush option by pressing “flush” switch for about five seconds. When “power on” light begins flashing, release “flush” switch. Flush setting has been changed. Change back to “Normal” setting in the same manner.