


*Coleman-Mach*  
**MACH 3 PLUS™**  
INTERNATIONAL  
RV AIR CONDITIONER

As the best-selling air conditioner in the world, the Mach 3 PLUS™ is also one of the best air conditioning values available.

The Mach 3 PLUS™ features large evaporator and condenser coils with raised lance fins to help dissipate heat. It has a solid 13,500 nominal BTUH cooling capacity and delivers 320 CFM (cubic feet per minute) or 543.7 CMH (cubic meters per hour) airflow.

Add the optional Heater Assembly and you'll have 5,600 BTUHs of heat for cooler outings.

You can count on the Mach 3 PLUS™ for reliability too. All-Copper tubing and gas-flux brazed joints ensure durability and long life for your air conditioner.

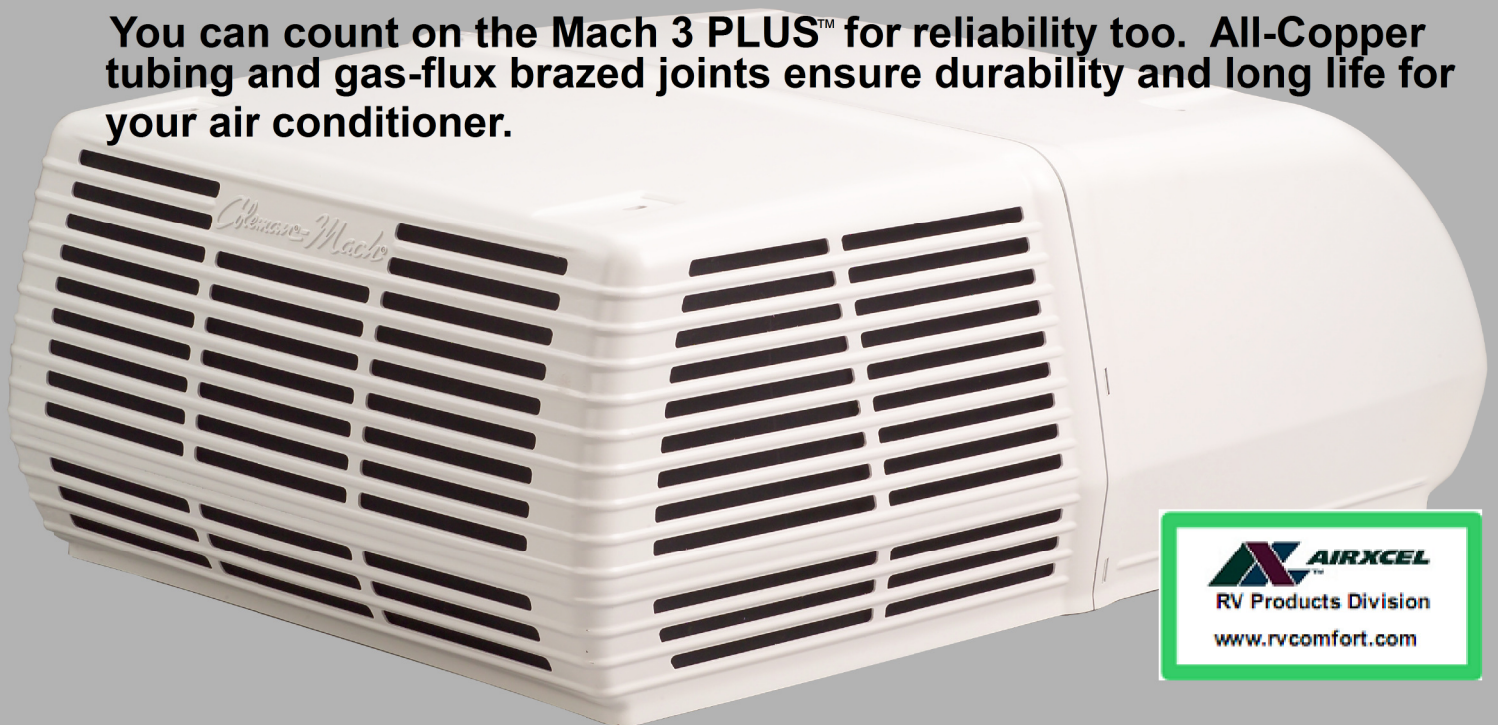

 **AIRXCEL™**  
RV Products Division  
[www.rvcomfort.com](http://www.rvcomfort.com)

*Coleman-Mach*  
**MACH 3 PLUS™**

**INTERNATIONAL  
 RV AIR CONDITIONER**


Mach 3 PLUS INTERNATIONAL 8373 SERIES	
Nominal BTU Cooling Capacity	13,500
Locked Rotor Cooling Amps	32
Running Watts/Cooling <sup>1</sup>	1,687
Running Watts/Cooling <sup>2</sup>	2,117
Running Watts/Heating <sup>3</sup>	1,800
Electrical Rating	240VAC 50Hz 1Phase
Delivered BTU Heating Output*	5,600
Unit Weight (lbs.)**	95lbs. (43.1kg)
Approximate Full-Load Amps/Cooling	7.4
Approximate Full-Load Amps/Heating*	9.0
Evaporator Air Delivery (high speed)	320CFM (543.7CMH)

## There's no better value for true cooling capacity.

- ▶ **1** Large evaporator and condenser coils with raised lance fins enhance the system's ability to dissipate heat.
- ▶ **2** At ½ hp, the fan motor in the Mach 3 PLUS™ is the largest in the industry. It features a sealed shaft to protect against damage from the elements.
- ▶ **3** Start kit with start capacitors and relays is standard equipment to allow the air conditioner to start easier under high temperature and humidity conditions.

The Mach 3 PLUS™ has a powerful compressor with a nominal cooling capacity of 13,500 BTUH and a 320 CFM (cubic feet per minute) or 543.7 CMH (cubic meters per hour) airflow.

- Corrosion-resistant, stainless steel trusshead screws secure the shroud. The nylon washer underneath flexes with the shroud in the wind and distributes stress more evenly to prevent shroud fractures.
- Plastic drain pan eliminates corrosion.

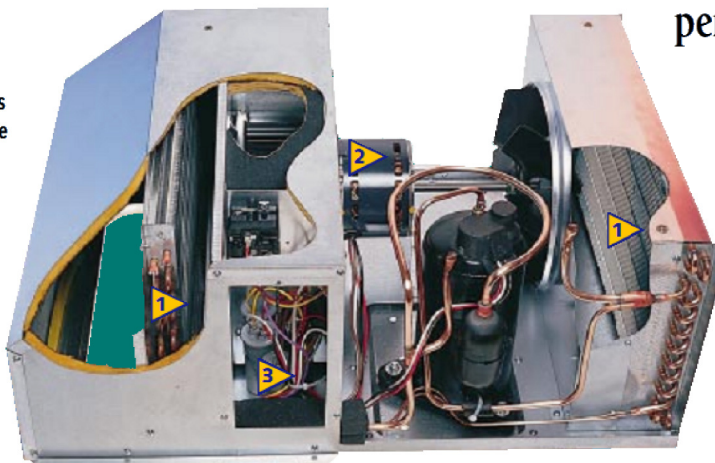

- Optional Heater Assembly can be added to provide a source of warm air.



\*Optional Heater Assembly  
 \*\*Installed weight will vary with Ceiling Package Option.  
<sup>1</sup>Tested under the following conditions: Cooling A.R.I. Standard Conditioning 80° F. (26° C.) DB/67° F. (19° C.) WB Indoor, 95° F. (35° C.) DB Outdoor at 240 VAC  
<sup>2</sup>Tested under the following conditions: Cooling A.R.I. Standard Conditioning 95° F. (35° C.) DB/71° F. (22° C.) WB Indoor, 115° F. (46° C.) DB Outdoor at 216 VAC  
<sup>3</sup>Tested under the following conditions: 47° F. (8° C.) Outdoor Temperature.

**IMPORTANT:** It is not the policy of Airxcel, Inc. to size generators for application in recreational vehicles. However, when sizing generators, the electrical power consumption in watts for the entire vehicle must be determined and taken into consideration. Airxcel, Inc. tests all air conditioners in accordance with A.R.I. Standard 250-74.

Coleman is a registered trademark of the Coleman Company, Inc. used under license. Mach 3 PLUS is a trademark and Mach is a registered trademark of Airxcel, Inc. ©2000, Airxcel, Inc.